



MG3 Digital Weld Monitor

MG3

Digital Weld Monitor

The Digital Weld Monitor MG3 is available in three versions: Digital Basic, Digital-W1 and Digital-W2.

MG3 Digital Basic monitors weld current and voltage and calculates its derived parameters w/dual channel capabilities. While the Digital-W1 version can be equipped with one the Digital-W2 version can be equipped with two displacement measuring sensors. Both Digital-W versions control parts, speed, force and displacement if applicable.

The Digital Weld Monitor MG3 is a proven and state of the art solution which meets the needs of many industry markets.


KEY FEATURES

- Premium Digital Weld Monitor designed to control welding processes reliably, efficiently and conveniently
- Dual channel capability offers simultaneous monitoring of two welds
- Configurable graphic user interface with 4 display quadrants, graphic and numeric indicators as well as intuitive online help gives maximum transparency for all relevant parameters
- Full on-screen SPC capability generates real time monitoring
- Up to 99 available schedules provides maximum control and can be password protected if needed
- Modern interface infrastructure w/RS232 or Ethernet IP
- Weld interrupt functions enable the operator to steer the welding process
- Convenient and safe data storage and data transfer with USB port
- MG3 Digital W versions offer displacement and force measuring with optional sensor(s)

TYPICAL APPLICATIONS



Automotive



Electronics



Medical



IT&Multimedia



Aerospace



Defence



MG3 OPERATING PANEL


CONFIGURABLE RUN SCREEN

The high resolution colour display and user configurable run screen enables users to configure the display to show information relevant to their particular job function or chosen welding environment. The MG3 is operated easily by turning and pushing the toggle wheel. Up to 99 programs for various parameter settings can be stored




Welding oscilloscope functions / process development

MG3 can be used as oscilloscope for analysing measured waveforms and for comparing measuring values. A single screen shows different pen colours for up to four traces.

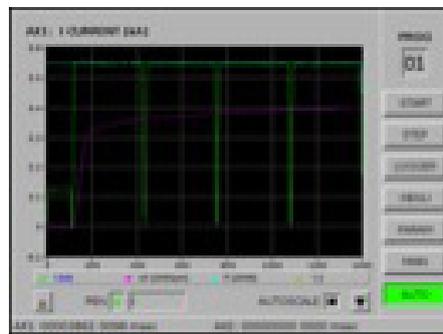


“Snapshot” saving function to USB stick

Pushing a button saves the current screen as .bmp on a USB stick. Waveforms can be saved as .csv for evaluation. All parameter settings can also be stored as backup file via USB. Standard interfaces are Digital I/O, RS 232, Ethernet TCP/IP, Modbus TCP.

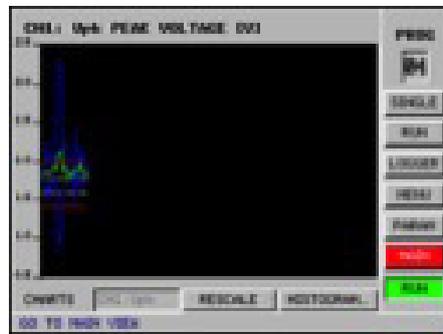

Statistical process control (SPC) and quality assurance

MG3 offers both data logging and on-screen SPC including run charts, histograms and analyses. The MIYACHI PECO WinWeld data collection and analysis software provides a comfortable method for process monitoring, comparison and storage.

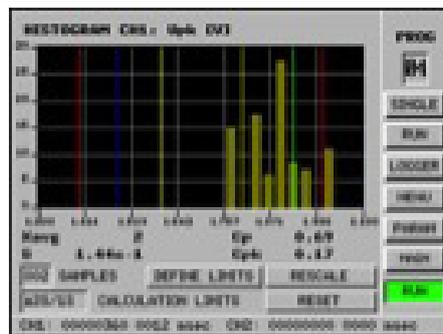

TECHNICAL SPECIFICATIONS

	Digital Basic	Digital-W1	Digital-W2
Weld current types	Direct current, alternating current and capacitor discharging		
Configuration basic	1 closed toroidal coil d-70 mm and voltage measuring cables; 2-channel current and voltage measuring parallel with external BCD program selection, turn pressure knob for menu selection and parameter input	See Digital basic version and analog inputs for force or pressure plus the option to connect 1 displacement sensor	See basic version and analog inputs for force or pressure plus the option to connect 2 displacement sensors
Measuring functions	Current, voltage, charging, time, power, energy, resistance, pre-warning and limit values, envelope waveform function, counter, statistic process control (calculated values can be stored as limit values)	See Digital Basic version plus displacement, part detection, speed, pressure	
Options	WinWeld software; toroidal coils	Adapter box and displacement sensors w/varying resolution from 0.1 or 1.0 µm and varying strokes.	
Supply voltage	110 – 240 V AC		
Main frequency	50-60 Hz		
Connected rating	60 W		
Fusing	Internal 2 A delayed		
Connecting cable	3 x 0,75 mm ² , 2 m long		
Protection class	IP30		
Graphic display	120 x 90 mm		
Graphic scan	With measuring time <= 50 ms: 40 dots/ms With measuring time >= 50 ms: 5 dots/ms		
Storage device	USB stick via built-in USB port		
Current measuring range / accuracy	2 – 500 kA resp 0.2 – 50 kA (with coil x 10)/ +/- 1.5% of measurement range limit value (w/o coil)		
Voltage measuring range / accuracy	0.5 – 50 V / +/- 1.5% of measurement range limit value		
Monitor schedules	99		
Measuring times	DC: 1 - 2000 ms; AC: 1 – 5000 ms		
Scanning rate	12.5 µs per channel		
Analog input	I – channel 1 and 2; U – channel 1 and 2	Pressure, Force 0-10 V	
Analog output	I – channel 1 und 2		
Digital input	15-p. D-SUB male connector, BCD; 25-p, D-SUB male connector		
Digital output	15-p. D-SUB male connector, BCD; 25-p, D-SUB male connector		
Digital interfaces	Digital I/O, RS232, Ethernet TCP/IP, USB port and Modbus TCP are standard interfaces, Profibus or Ethernet/IP are optional features		
Serial interface RS232	Output of measuring values in ASCII compatible printer format		
Environment temp.	0-40 °C		
	Digital-W1	Digital-W2	
Pressure measuring range / accuracy	0 – 10 bar/ + 1 % measurement range limit value		
Pressure measured value resolution	According to sensor type 1.3 to 2.5 mbar		
Displacement measuring range / accuracy	0 – 12.5 mm / +/- 2 µm with sensor 1 µm		
Displacement measured value resolution	According to sensor type 1 to 0.1 µm digital		
Legal Approval	CE compliant		

WEIGHT & DIMENSIONS - LEGAL APPROVAL

	Digital Basic	Digital W1	Digital W2
Weight	approx. 5,4 kg		
Dimensions (LxHxD)	240x135x320 mm		



Lindberghstrasse 1 • DE-82178 Puchheim, Germany
 T: +49 (0) 89 83 94 030 • Fax : +49 (0) 89 839403 68
 infode@amadamiyachi.eu • www.amadamiyachieurope.com
 ISO 9001 Certified Company



EUROPE

Amada Miyachi Europe BV
 Helmond, The Netherlands
 T: +31 (0) 492 542 225
 infoeu@amadamiyachi.eu

Amada Miyachi Europe Kft.
 Budapest, Hungary
 T: +36 1 431 9927
 infohu@amadamiyachi.eu

Amada Miyachi Europe
 Derby, United Kingdom
 T: +44 (0) 1332 361 238
 infouk@amadamiyachi.eu

Amada Miyachi Europe
 Saint Germain en Laye, France
 T: +33 (0) 139 046 430
 infofr@amadamiyachi.eu

Amada Miyachi Europe
 Torino, Italy
 T: +39 011 223 83 16
 infoit@amadamiyachi.eu

Amada Miyachi Europe
 Prague-West, Czech Republic
 T: +420 251 512 157
 info.cz@amadamiyachi.eu

AMERICAS

Amada Miyachi America Inc.
 Monrovia, CA, USA
 T: +1-626-303-5676
 info@amadamiyachi.com

Amada Miyachi do Brasil Ltda.
 Sao Paulo, Brasil
 T: +55-11-4193-1187
 antonio.ruiz@miyachi.com

ASIA

Amada Miyachi Co., Ltd.
 Noda, Japan
 T: +81-4-7125-6177
 sales@miyachi.com

Amada Miyachi Shanghai, Co., Ltd.
 Shanghai, China
 T: +86-21-6448-6000
 zqzhang@msc.miyachi.com

Amada Miyachi Korea Co., Ltd.
 Gyeonggi-do, Korea
 T: +82-31-8015-6810
 dykim@mkc.miyachi.com

Amada Miyachi Taiwan Co., Ltd.
 Taipei, Taiwan R.O.C.
 T: 886-2-2397-4778
 keigaku@miyachi.com

Amada Miyachi (Thailand) Co., Ltd.
 Samutprakarn, Thailand
 T: +66-2751-9337-8
 info@mtl.miyachi.com

Amada Miyachi Vietnam Co., Ltd.
 Ho Chi Minh City, Vietnam
 T: +84-8-3771-7972

Amada Miyachi India Pvt., Ltd.
 Bangalore, Karnataka
 info@miyachiindia.com

All data, images and text are subject to change at any time. Amada Miyachi Europe GmbH reserves the right to change, modify, delete and add technical specifications and product details at any time without prior notification. © 2015 Amada Miyachi Europe GmbH.

follow us on:

